

# Fitting Instructions 1303602 kit

**WHITELINE**  
PO Box 5666, Minto, NSW, 2566 Australia  
Ph: 61 2 9603 0111 Fax: 61 2 9820 2500  
E-mail: admin@whiteline.com.au  
A.B.N. 93 051 207 535

*Flat out*

Code: 250

Application: Subaru Forester SF series GT with self levelling suspension.

Refer catalogue for detailed application guide.


This sheet is designed to be used in conjunction with the replacement insert instructions to fit the 1303602 insert into the OE or stock leg. It does away with and converts from the OE self-levelling system.

Contents: Each kit contains;

- 1 x M12 x 1.5 x 70mm high tensile bolts
- 1 x M12 washes
- 1 x F42 Spacer tubes, (22mm O.D., 39mm long, 12mm centre hole)
- 1 x CB191 Locating sleeve, (round tube with 5mm wall thickness)

Fitting: . . . . . Please read complete instructions before commencing work.

1. Jack vehicle and support on safety stands, remove strut and spring assembly.
2. Remove spring from strut assembly.
3. Dismantle rear strut assembly by undoing gland nut and removing the internals of the strut. (Be very careful to undo the gland nut slowly, as there is very high gas pressure inside the strut).
4. Cut off the strut assembly 60mm from the top, (**Note: this is contradictory to the fitting instructions supplied with the replacement shock inserts when fitted to this application.**)
5. Drill a 14 mm hole in the bottom of the strut assembly, as per actual shock fitting instructions.
6. Fit spacer tube, part # F42, inside strut assembly. Fit locating sleeve, part # CB191, inside top of strut housing, to locate the actual replacement shock insert.
7. Fit the shock insert according to the separate shock instructions, and secure using the supplied M12 x 1.5 x 70mm bolt and washers.

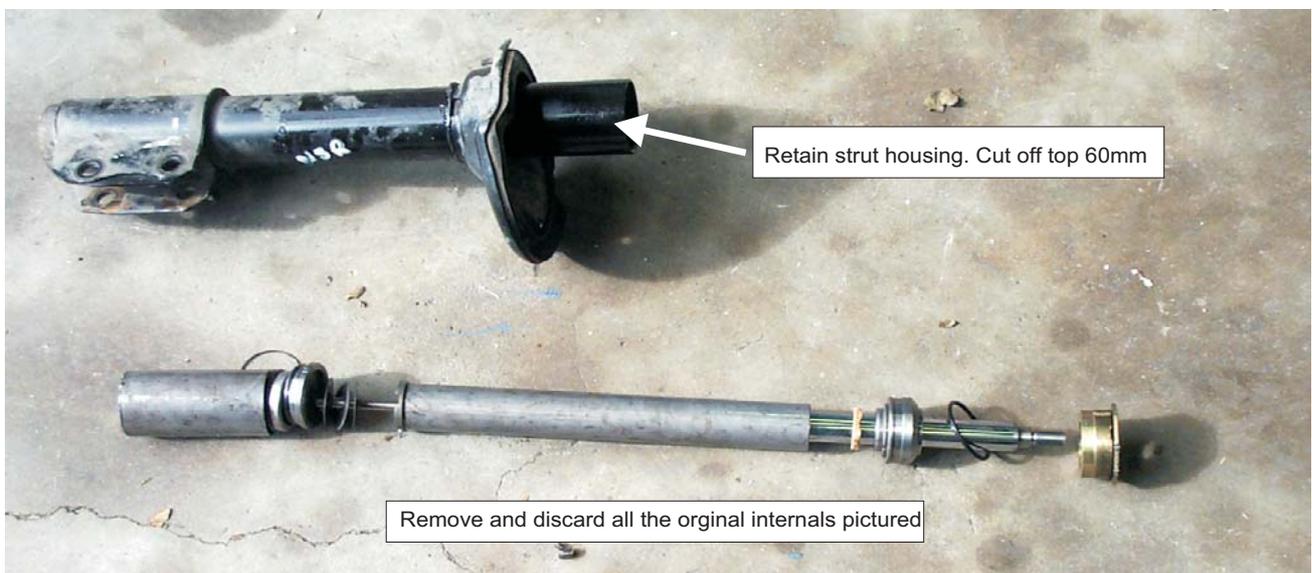

**Warning:** Please drive carefully while you accustom yourself to the changed vehicle behaviour.